


Equivalent Orthogonal Regions Behavior With Miros

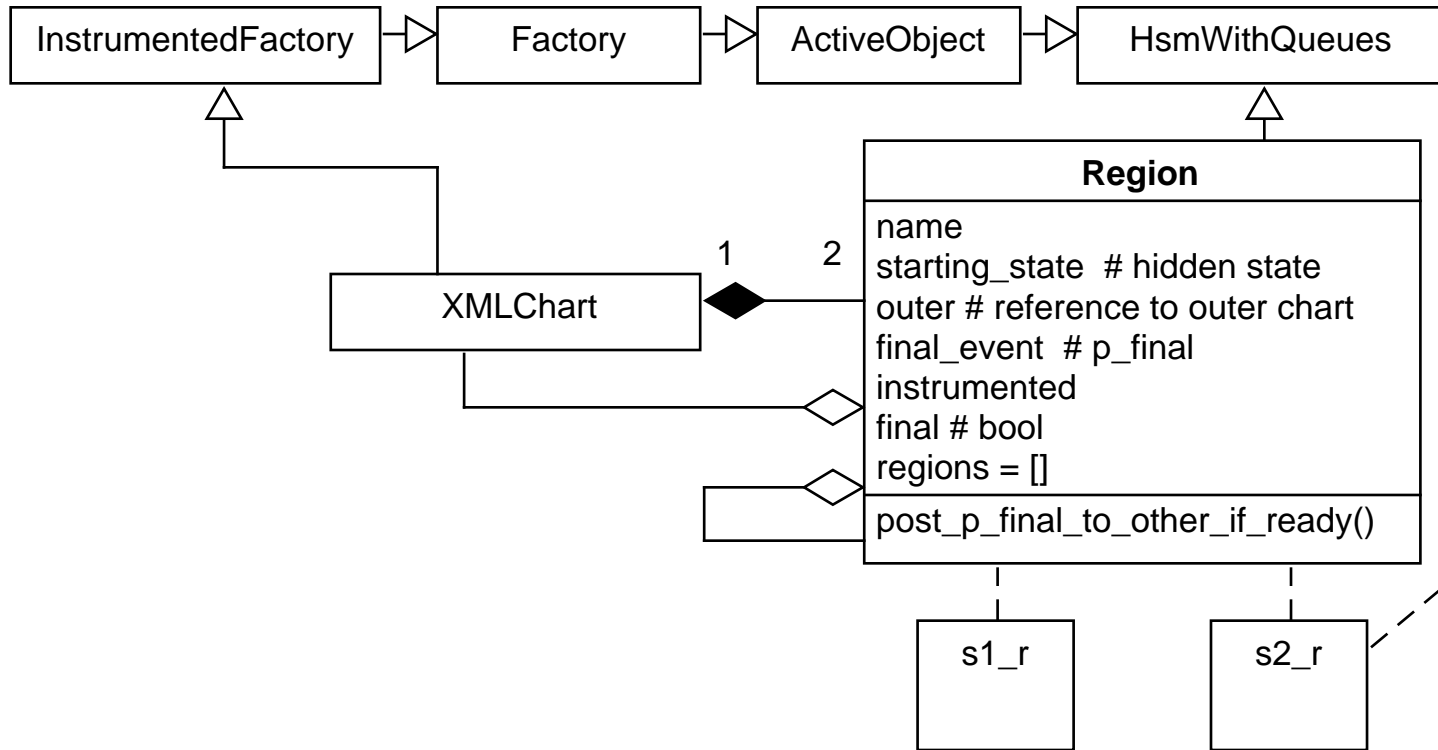

Example (within XmlChart __init__):

```

self.p_region.append(
    Region(
        name='s2_r',
        starting_state=s2_hidden_state,
        outer=self,
        final_event=Event(signal=signals.p_final)
    ))
  
```